



MIL-C-38999  
Series III & IV,  
EN3645

M85049/38 S 11 W

Basic Part No. \_\_\_\_\_  
S = Self-Locking \_\_\_\_\_  
Use Dash for Non-Self-Locking \_\_\_\_\_  
Shell Size \_\_\_\_\_

Material and Finish Designator  
A = Aluminum, Black Anodize  
(Non-Self-Locking Only)  
N = Aluminum, Electroless Nickel  
(Self-Locking Only)  
S = 300 Series Steel, Passivated  
(Self-Locking Only)  
W = Aluminum, 500 Hour Cadmium Olive Drab  
Over Electroless Nickel

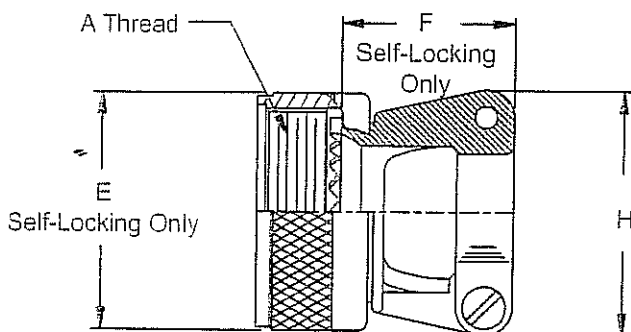

Note: Screw orientation shown is for non-self-locking configuration. Screws on self-locking configurations are on the same side/face of the clamp.

Shell Size	Shell Size Ref.	A Thread Class 2B	E Dia Max Self-Locking Only	F Max Self-Locking Only	H Max	Cable Entry	
						Min	Max
9	A	M12 X 1 - 6H	.858 (21.8)	.91 (23.1)	.85 (21.6)	.098 (2.5)	.234 (5.9)
11	B	M15 X 1 - 6H	.984 (25.0)	.91 (23.1)	.90 (22.9)	.153 (3.9)	.234 (5.9)
13	C	M18 X 1 - 6H	1.157 (29.4)	1.01 (25.7)	1.10 (27.9)	.190 (4.8)	.328 (8.3)
15	D	M22 X 1 - 6H	1.279 (32.5)	1.06 (26.9)	1.15 (29.2)	.260 (6.6)	.457 (11.6)
17	E	M25 X 1 - 6H	1.406 (35.7)	1.16 (29.5)	1.30 (33.0)	.283 (7.2)	.614 (15.6)
19	F	M28 X 1 - 6H	1.516 (38.5)	1.41 (35.8)	1.50 (38.1)	.325 (8.3)	.634 (16.1)
21	G	M31 X 1 - 6H	1.642 (41.7)	1.51 (38.4)	1.60 (40.6)	.343 (8.7)	.698 (17.7)
23	H	M34 X 1 - 6H	1.768 (44.9)	1.66 (42.2)	1.70 (43.2)	.381 (9.7)	.823 (20.9)
25	J	M37 X 1 - 6H	1.889 (48.0)	1.76 (44.7)	1.80 (45.7)	.418 (10.6)	.853 (21.7)

**ELIMEC**  
TEL: 03-9514122  
FAX: 03-9514166  
P.O.B. 5006 RISHON LEZION 75150  
E-mail: mail@elimec.co.il