




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
⌒	3842-002 WAS 3842	19MAY05
⌒	ADDED OPTIONAL CONSTRUCTION NOTE	04APR06

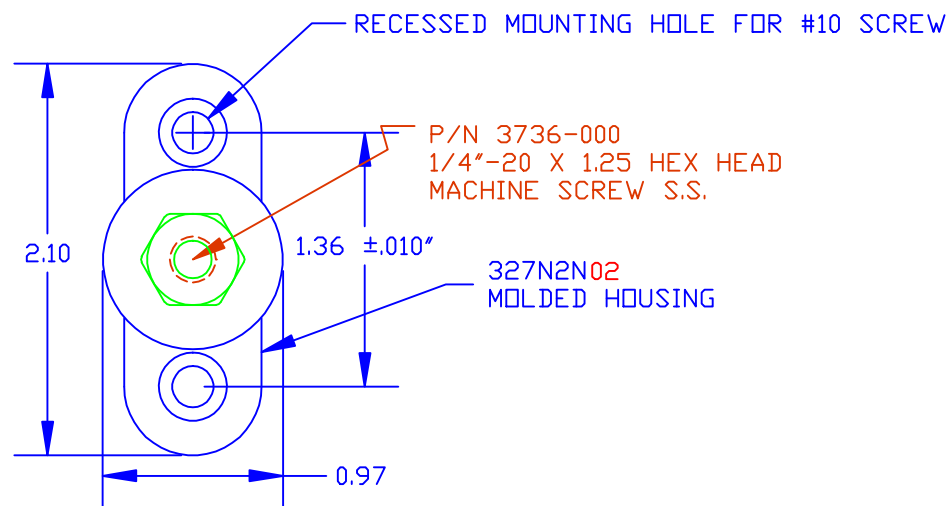

DO NOT
SCALE

P/N 3842-003 1/4"-20 STAINLESS
STEEL HEAVY HEX JAM NUT 2 PLCS.
BOTTOM NUT FACTORY INSTALLED TO
72 IN./LBS.
OPTIONAL CONSTRUCTION:
P/N 3842-000 1/4"-20 TIN-PLATED
BRASS JAM NUT 2 PLCS.
BOTTOM NUT FACTORY INSTALLED TO
72 IN./LBS.

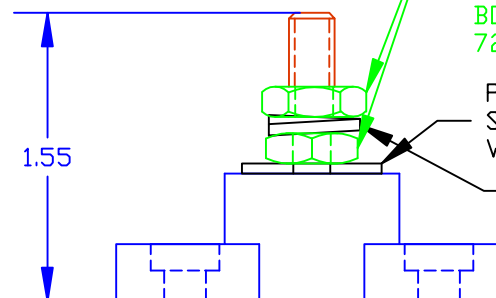


P/N 3644-000 1/4" X .055" X .750"
STAINLESS STEEL FLAT
WASHER
P/N 3637-000 STAINLESS STEEL
SPRING LOCK WASHER

329N0V02
CAVITY PLUG

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
VOLTAGE RATING: 48 VDC MAX.
CURRENT RATING: 165 AMPS @ 12 VDC
TEMP. RISE AT LOAD: 52 DEG. F.
MAXIMUM RECOMMENDED TORQUE: 60 IN./LBS.

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF: *****	DATE: 09APR03	DRN BY: BRH CHK'D BY: BRH	WEIGHT: *****
TITLE: 1/4" SMALL JUNCTION STUD			SCALE:
MATERIAL:		PART NO.	
COLOR: RED	DRG CLASS: *****	77025 N02	