


KD / MIL-DTL-5015 Series I

How to order


KD Order Reference

KD 3102A 18-10 P W-**(**)

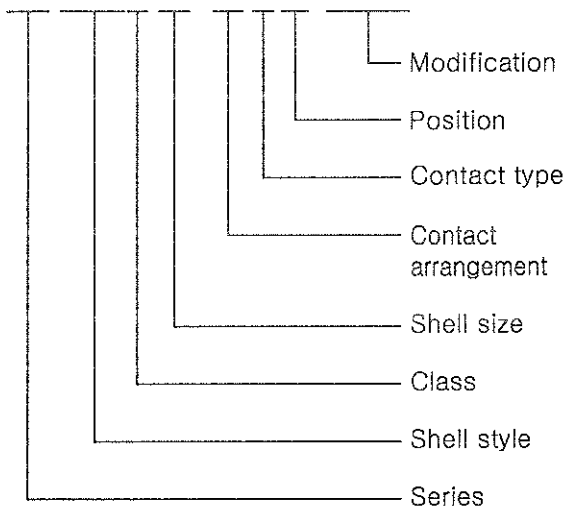

MS Order Reference

MS 3102A 18-10 P W

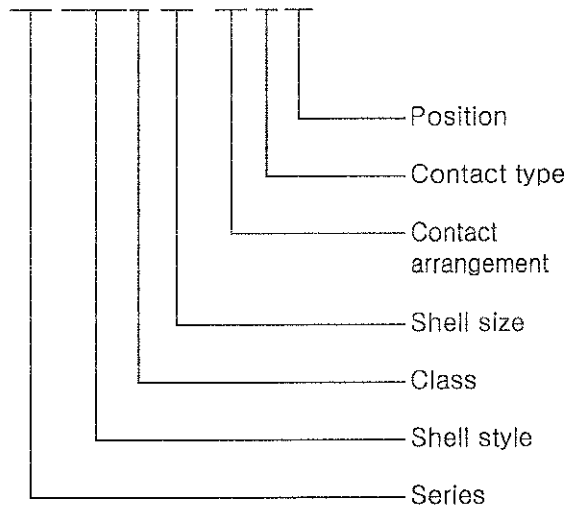

Series

- KD Kukdong circular connectors with threaded coupling
- MS Military Standard

Shell style

- 3100 Wall mounting receptacle
- 3101 Cable connecting plug
- 3102 Box mounting receptacle
- 3106 Straight plug
- 3108 90° plug
- 25183 Potting seal plug

Class

- A Solid shell solder contact connectors.
- B Split shell solder contact connectors.
- E/F Environmental with resilient insulators and integral cable clamp.
- P Environment resistant potted solder contact connectors.
- R Environmental with resilient insulators and shortened light weight endbell.

Note : classes E/F/P/R are IP68 watertight.

Shell size

- 10SL, 12s, 12, 14s, 16s, 16, 18
- 20, 22, 24, 28, 32, 36, 40

Contact arrangement

See page 7~18

Contact type

- P - Pin contact
- S - Socket contact

Position

Alternate insert position(W,X,Y or Z)
Leave Blank for Normal position
See page 7~8

Modification

- without code Olive drab over zinc plating (standard)
- A01 Black over zinc/nickel plating
- A02 Black over zinc plating (RoHS compliant)
- A03 Electroless nickel plating
- F80 Crimp AWG contacts (with fire retardant insulator)